


LUXPANEL EDGE LIT FRAMED

600mm x 600mm

Aluminium framed panel in white finish

- TPb diffuser
- Excellent luminous uniformity over diffuser surface

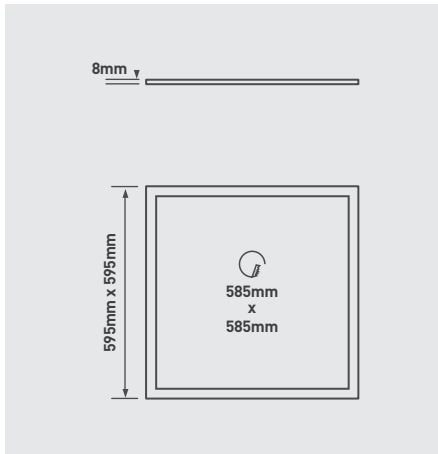

4000K
NEUTRAL
WHITE

50,000
HOURS

WHITE FINISH
RAL9016

IP44
RATED

CRI
>80

CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W	CURRENT
LP66W20S40	Standard	2000	18W	111	500mA
LP66W20D40	Digital Dimmable	2000	18W	111	500mA
LP66W28S40	Standard	2800	25W	112	700mA
LP66W28D40	Digital Dimmable	2800	25W	112	700mA
LP66W35S40	Standard	3500	32W	110	900mA
LP66W35D40	Digital Dimmable	3500	32W	110	900mA
LP66W42S40	Standard	4200	38W	110	1050mA
LP66W42D40	Digital Dimmable	4200	38W	110	1050mA


	LENGTH / DIA (mm)	WIDTH (mm)	HEIGHT / DEPTH (mm)	WEIGHT (kg)	L FIXING CENTRES (mm)	W FIXING CENTRES (mm)	CEILING CUTOOUT (mm)	LUMINAIRE LUMENS (Llm)	LUMINAIRE WATTAGE (W)	EFFICACY (Llm/W)	CCT (K)	CRI	UGR	IP RATED	IK RATED	GLOW WIRE (°C)	RAL COLOUR	TEMP RANGE (°C)	RATED LIFE (HR)	AMBIENT TEMP. RATED LIFE (°C)	L AT RATED LIFE	B AT RATED LIFE	VOLTAGE RANGE	FREQUENCY	EMERGENCY PACK CODE	WARRANTY (YEARS)
LP66W20S40	595	595	8	2.95	N/A	N/A	585 x 585	2000	18	111	4000	>80	≤19	IP44	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5
LP66W20D40	595	595	8	2.95	N/A	N/A	585 x 585	2000	18	111	4000	>80	≤19	IP44	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5
LP66W28S40	595	595	8	2.95	N/A	N/A	585 x 585	2800	25	112	4000	>80	≤19	IP44	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5
LP66W28D40	595	595	8	2.95	N/A	N/A	585 x 585	2800	25	112	4000	>80	≤19	IP44	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5
LP66W35S40	595	595	8	2.95	N/A	N/A	585 x 585	3500	32	110	4000	>80	≤20	IP44	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5
LP66W35D40	595	595	8	2.95	N/A	N/A	585 x 585	3500	32	110	4000	>80	≤20	IP44	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5
LP66W42S40	595	595	8	2.95	N/A	N/A	585 x 585	4200	38	110	4000	>80	≤20	IP44	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5
LP66W42D40	595	595	8	2.95	N/A	N/A	585 x 585	4200	38	110	4000	>80	≤20	IP44	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5

LP66W28S40

LUMINAIRE PERFORMANCE

Light Output Ratio: 100%
 Luminaire Efficacy: 111.99 lm/W
 Light Distribution: A40 ↓100.0% ↑0.0%
 CIE Flux Codes: 47 78 95 100 101
 UGR 4H 8H (20%, 50%, 70%)C0 / C90: 19.2 / 20.2

LUMINOUS INTENSITY

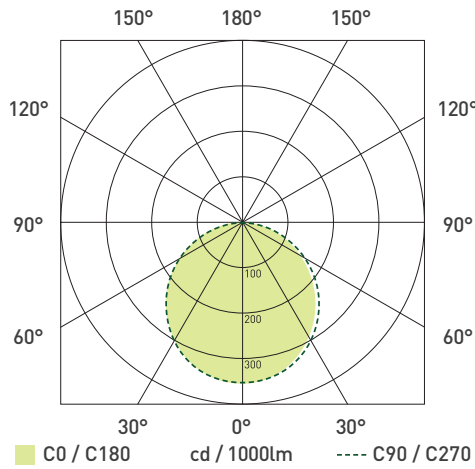


LP66W35S40

LUMINAIRE PERFORMANCE

Light Output Ratio: 100%
 Luminaire Efficacy: 109.35 lm/W
 Light Distribution: A40 ↓100.0% ↑0.0%
 CIE Flux Codes: 47 78 95 100 101
 UGR 4H 8H (20%, 50%, 70%)C0 / C90: 20.0 / 21.0


LUMINOUS INTENSITY

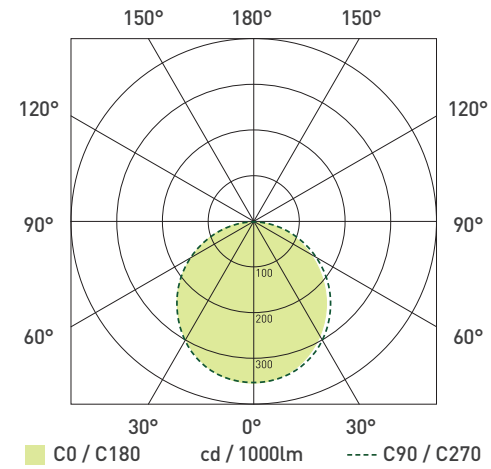

LUCECO



This luminaire contains built-in LED lamps.



LED

The lamps cannot be changed in the luminaire.

874/2012



STANDARDS

EN 60598-1	Luminaires - General requirements
EN 60598-2-2	Luminaires - Recessed
EN 60598-2-22	Luminaires - Emergency
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

