

LUXPANEL EDGE LIT FRAMED

1200mm x 300mm


1200 x 300mm edgelit panel with white aluminium frame

- Precision aluminium frame with no visible corners
- 2800 to 4200 Lumens, efficacy up to 112Llm/W
- Recessed to suit 15 or 24mm exposed T bar ceiling



LiteIP™

5 years standard warranty available in the UK. Rest of the world may vary, please ask your local distributor for more information.

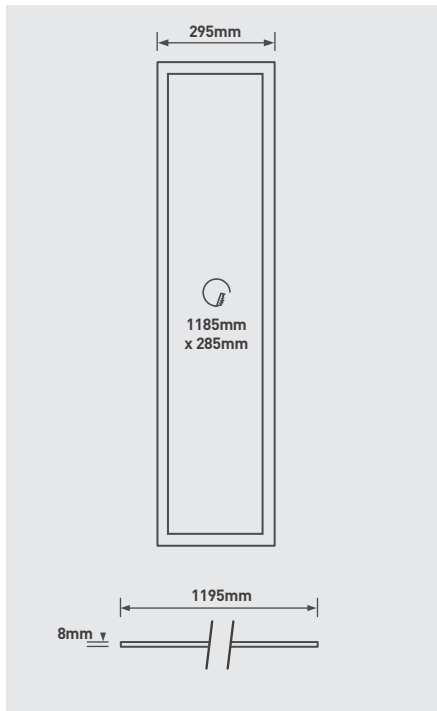

CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W	CURRENT
LP312W28S40	Standard	2800	25W	112	700mA
LP312W28D40	Digital Dimmable	2800	25W	112	700mA
LP312W35S40	Standard	3500	32W	110	900mA
LP312W35D40	Digital Dimmable	3500	32W	110	900mA
LP312W42S40	Standard	4200	40W	105	1,050mA
LP312W42D40	Digital Dimmable	4200	40W	105	1,050mA

Options

- Remote Emergency Pack LED3EP80
- Self Test Emergency Pack LED3EP80EST
- DALI Addressable Emergency Pack LED3EP80DED
- LiteIP Connectivity insert **W** e.g. LP312W28**W**40

Accessories

- LPF66W - Surface mounting frame
- LPF66SCRF - Recess frame
- LWSK415 - Wire suspension kit (See page 54)


	LENGTH / DIA (mm)	WIDTH (mm)	HEIGHT / DEPTH (mm)	WEIGHT (kg)	L FIXING CENTRES (mm)	W FIXING CENTRES (mm)	CEILING CUTOUT (mm)	LUMINAIRE LUMENS (Llm)	LUMINAIRE WATTAGE (W)	EFFICACY (Llm/W)	CCT (K)	CRI	UGR	IP RATED	IK RATED	GLOW WIRE (°C)	RAL COLOUR	TEMP RANGE (°C)	RATED LIFE (HR)	AMBIENT TEMP. RATED LIFE (°C)	L AT RATED LIFE	B AT RATED LIFE	VOLTAGE RANGE	FREQUENCY	EMERGENCY PACK CODE	WARRANTY (YEARS)
LP66W28S40	1195	295	8	3.35	N/A	N/A	1185 x 285	2800	25	112	4000	>80	≤18	IP40	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5
LP66W28D40	1195	295	8	3.35	N/A	N/A	1185 x 285	2800	25	112	4000	>80	≤18	IP40	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5
LP66W35S40	1195	295	8	3.35	N/A	N/A	1185 x 285	3500	32	110	4000	>80	≤19	IP40	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5
LP66W35D40	1195	295	8	3.35	N/A	N/A	1185 x 285	3500	32	110	4000	>80	≤19	IP40	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5
LP312W42S40	1195	295	8	3.35	N/A	N/A	1185 x 285	4200	40	105	4000	>80	≤20	IP40	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz		5
LP312W42D40	1195	295	8	3.35	N/A	N/A	1185 x 285	4200	40	105	4000	>80	≤20	IP40	IK04	850	9016	-20 to +30	50,000	25	70	10	220-240V	50hz	LED3EP80-OJ	5

LP312W28S40

LUMINAIRE PERFORMANCE

Light Output Ratio: 100%
 Luminaire Efficacy: 112 lm/W
 Light Distribution: A40 ↓99.6% ↑0.4%
 CIE Flux Codes: 48 79 96 100 100
 UGR 4H 8H (20%, 50%, 50% 70%)C0 / C90: 18.2 / 17.6

LUMINOUS INTENSITY

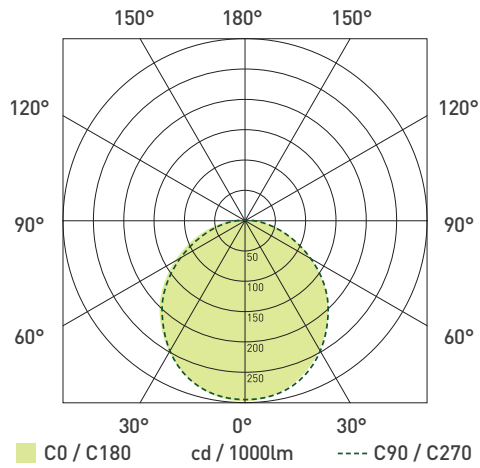


LP312W35S40

LUMINAIRE PERFORMANCE

Light Output Ratio: 100%
 Luminaire Efficacy: 110 lm/W
 Light Distribution: A40 ↓99.6% ↑0.4%
 CIE Flux Codes: 48 79 96 100 100
 UGR 4H 8H (20%, 50%, 50% 70%)C0 / C90: 19.4 / 18.5


LUMINOUS INTENSITY

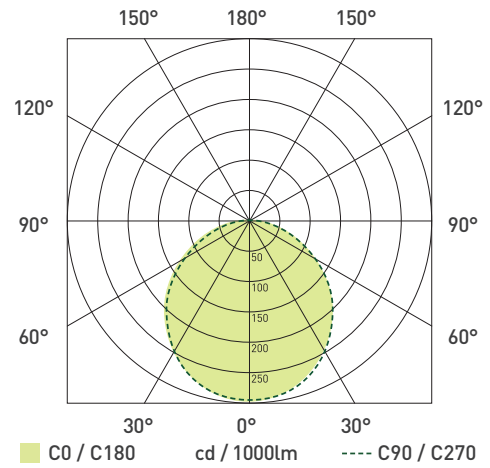

LUCECO



This luminaire contains built-in LED lamps.



LED

The lamps cannot be changed in the luminaire.

874/2012



STANDARDS

EN 60598-1	Luminaires - General requirements
EN 60598-2-2	Luminaires - Recessed
EN 60598-2-22	Luminaires - Emergency
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

