


ESSENCE PLATINUM SURFACE DOWNLIGHT



- Excellent luminous uniformity over diffuser surface
- Aluminium housing materials in white/black colored
- UGR < 19
- Beam Angle Available 24°/40°/60° upon request
- MacAdam Step 3
- L80, B10 at 50,000 burning hours
- IK 02 rated



CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W	DIMENSION (D x H)
ELDS08W12S40	Standard	1200	10W	120	75 x 100mm
ELDS10W24S40	Standard	2400	20W	120	95 x 152mm
ELDS12W33S40	Standard	3300	30W	110	115 x 152mm
ELDS14W40S40	Standard	4000	40W	100	140 x 162mm
ELDS08B12S40	Standard	1200	10W	120	75 x 100mm
ELDS10B24S40	Standard	2400	20W	120	95 x 152mm
ELDS12B33S40	Standard	3300	30W	110	115 x 152mm
ELDS14B40S40	Standard	4000	40W	100	140 x 162mm

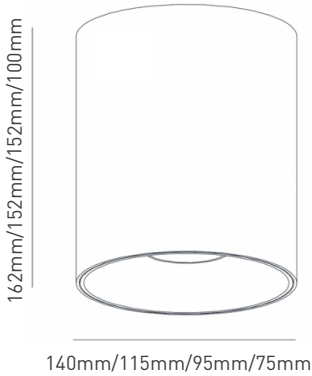

LUCECO

This luminaire contains built-in LED lamps.

A++
A+
A
B
C
D
E

} LED

The lamps cannot be changed in the luminaire.

874/2012

STANDARDS

EN 60598-1	Luminaires - General requirements
EN 60598-2-2	Luminaires - Recessed
EN 60598-2-22	Luminaires - Emergency
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

