


# LUXPANEL CLEAN ROOM IP65

600mm x 600mm

- Sheet metal body
- Extruded aluminium framed
- Antibacterial White finish (RAL9003)
- Tempered glass diffuser
- IP65 & IK08 Rating
- Ambient Temp: -20° ~ +40°
- Excellent luminous uniformity over diffuser surface
- Suitable for Clean room application

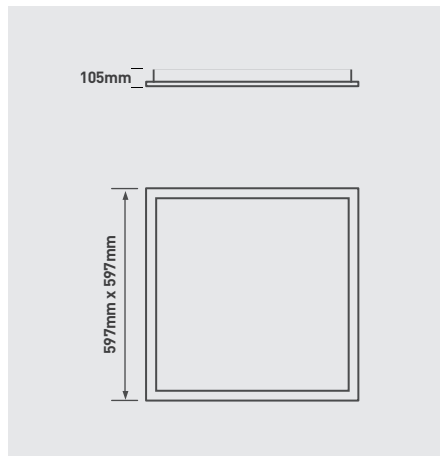


CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W	RATED LIFE
LP66IP45S40-CLR	Standard	4500	45W	100	L80/B10
LP66IP45D40-CLR	DALI	4500	45W	100	L80/B10

LUCECO



This luminaire contains built-in LED lamps.



LED

The lamps cannot be changed in the luminaire.

874/2012



STANDARDS

EN 60598-1	Luminaires - General requirements
EN 60598-2-2	Luminaires - Recessed
EN 60598-2-22	Luminaires - Emergency
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

