

# MIMIC MIRROR LIGHT

## Product Features

A 600mm mirror light with a dual voltage shaver socket output suitable for hotels, bathrooms and communal areas

- Extruded polycarbonate diffusers gives a strong construction with uniform illumination
- 1200 Lumens at 15W this mirror light is supplied in 4000K
- Available in a white or chrome finish




CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	Lm/W
LML6W12N40	Standard	1200	15W	80
LML6W12S40	Standard	1200	15W	80
LML6C12N40	Standard	1200	15W	80
LML6C12S40	Standard	1200	15W	80

## Product Code Notes:

'W' - White | 'C' - Chrome | 'N' - Normal | 'S' - Shaver Socket


## Product Drawings

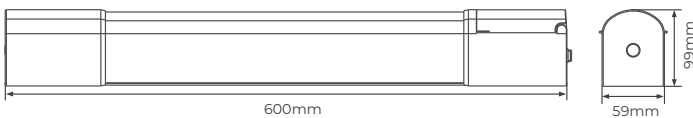

### LML6W12N40 Luminaire Performance

Luminaire Efficiency: 100%  
 Luminaire Efficacy: 80 lm/W  
 Classification: A50 +99.6% +0.4%  
 CIE Flux Codes: 60 87 97 100 100  
 UGR 4H 8H (20%, 50%, 70%) CO / C90: 18.4 / 18.6

### Luminous Intensity

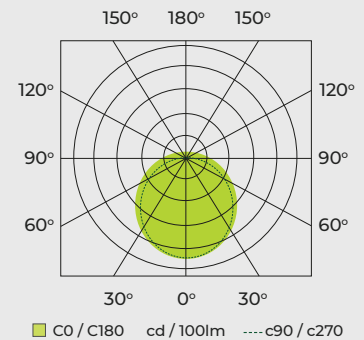

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-2	Luminaires – Recessed
EN 60598-2-22	Luminaires – Emergency
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

