

APPROVALS:

TYPE:  
NOTES:

JOB:

## LED READY ARCHITECTURAL SURFACE MOUNT - LWRS

### PRODUCT SPECIFICATIONS

INPUT VOLTAGE:

- 120-277V

CONSTRUCTION:

- Heavy-duty steel body
- Cast-aluminum endcaps
- All parts painted after fabrication to facilitate safe installation with smooth edges, increase efficiency, and inhibit corrosion

BODY FINISH: White

LENS:

- Impact resistant clear lens

NET WEIGHT: 11.5 Lbs

CONTROL OPTIONS:

- Integral behind-the-lens occupancy sensor

EFFICACY: Up to 110 Lm/W

IGNITION TIME: Less than 1sec.

OPERATING TEMPERATURE: -20°C to 40°C

POWER FACTOR: Greater than 0.9



### FEATURES


- Economical architectural LED surface mount solution
- Perfect for commercial and institutional applications
- Impact resistant clear lens
- T8 bypass lamps sold separately

### STANDARDS

RoHS	Complies with restriction of the use of certain hazardous substances
UL	Luminaires, light-emitting-diode
LM-79	IESNA method for the electrical and photometric measurements of LED light products
LM-80	IESNA method for measuring lumen maintenance of LED light sources
TM-21	IESNA method for projecting the lumen maintenance of LED light products



### DIMENSIONS

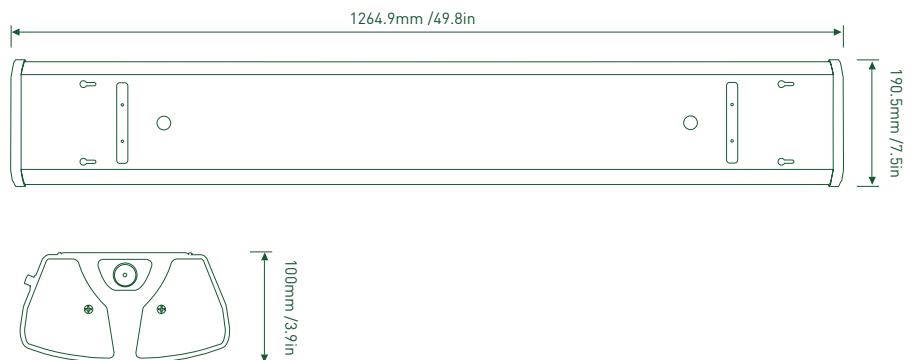


US Help line - **1 800 645-6460**  
 p - **281 978-2509**  
 e - **us\_sales@luceco.com**

Luceco Inc  
 11050 West Little York Rd Building C-1  
 Houston, TX 77041

Visit our website at

**www.luceco.com**

## POLAR CANDELA DISTRIBUTION

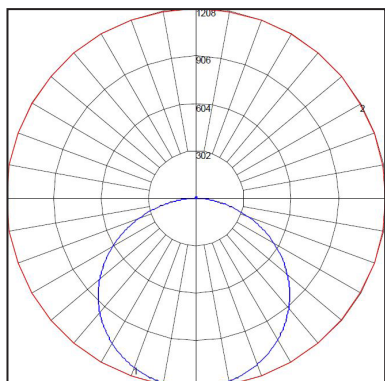

## ORDERING

MODEL NUMBER	LED TUBE COMPATIBILITY
LWRSWHCPTD38MG140N-US	Up to 44w fixture total maximum wattage

US Help line - **1 800 645-6460**  
p - **281 978-2509**  
e - **us\_sales@luceco.com**

Luceco Inc  
11050 West Little York Rd Building C-1  
Houston, TX 77041

Visit our website at

[www.luceco.com](http://www.luceco.com)