

APPROVALS:

TYPE:
NOTES:

JOB:

ARCHITECTURAL SURFACE MOUNT - LWRS

PRODUCT SPECIFICATIONS

INPUT VOLTAGE:

- 120-277V

CONSTRUCTION:

- Heavy-duty steel body
- Cast-aluminum endcaps
- All parts painted after fabrication to facilitate safe installation with smooth edges, increase efficiency, and inhibit corrosion

BODY FINISH: White

LENS:

- Impact resistant opal diffuser to reduce glare

NET WEIGHT: 11.5 Lbs

BEAM ANGLE: 125°

CONTROL OPTIONS:

- 0-10V Dimming
- Integral behind-the-lens occupancy sensor

COLOR TEMPERATURE: 4000K as standard

CRI: Greater than 80

EFFICACY: Up to 110 Lm/W

IGNITION TIME: Less than 1sec.

OPERATING TEMPERATURE: -20°C to 40°C

POWER FACTOR: Greater than 0.9

LUMEN MAINTENANCE (at 25°C):

- Greater than L70 at 75,000 hrs



FEATURES


- DLC listed architectural surface mount
- Perfect for commercial and institutional applications
- Uniform linear brightness with textured very low glare diffuse lens
- Also available in an economical LED T8 bypass lamp version, see LED Ready Architectural Surface Mount LVPT data sheet

STANDARDS

RoHS	Complies with restriction of the use of certain hazardous substances
UL	Luminaires, light-emitting-diode
DLC	Design Lights Consortium listed high-performance, energy-efficient luminaires
LM-79	IESNA method for the electrical and photometric measurements of LED light products
LM-80	IESNA method for measuring lumen maintenance of LED light sources
TM-21	IESNA method for projecting the lumen maintenance of LED light products



DIMENSIONS

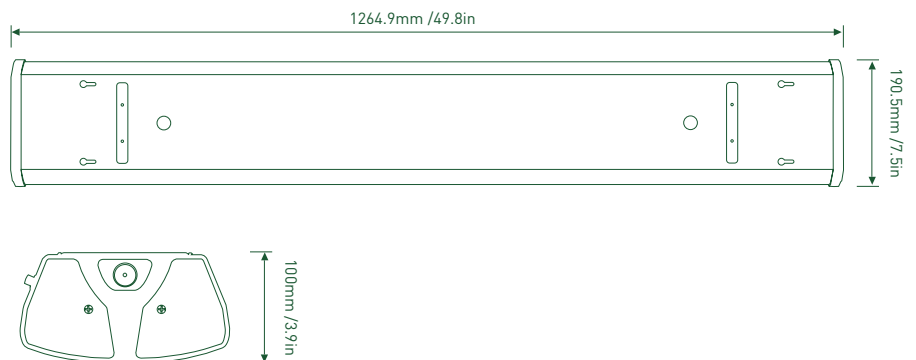

US Help line - **1 800 645-6460**
 p - **281 978-2509**
 e - **us_sales@luceco.com**

Luceco Inc
 11050 West Little York Rd Building C-1
 Houston, TX 77041

Visit our website at

www.luceco.com


CCT



4000K
NEUTRAL
WHITE

4000K 'neutral white' color temperature as standard.

POLAR CANDELA DISTRIBUTION

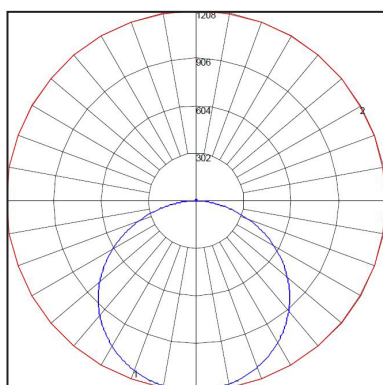

ORDERING

MODEL NUMBER	DRIVER	LUMENS	WATTAGE	EFFICACY lm/W	CCT	DIMMING
LWRSHWP22MG140N-US	Standard	2400	23W	104	4000K	-
LWRSHWP22MG140D-US	Dimmable	2400	23W	104	4000K	DIM
LWRSHWP22MG140DE-US	Emergency	2400	23W	104	4000K	DIM
LWRSHWP22MG140DMS-US	Occupancy Sensor	2400	23W	104	4000K	DIM
LWRSHWP44MG140N-US	Standard	4400	40W	110	4000K	-
LWRSHWP44MG140D-US	Dimmable	4400	40W	110	4000K	DIM
LWRSHWP44MG140DE-US	Emergency	4400	40W	110	4000K	DIM
LWRSHWP44MG140DMS-US	Occupancy Sensor	4400	40W	110	4000K	DIM

US Help line - **1 800 645-6460**
p - **281 978-2509**
e - **us_sales@luceco.com**

Luceco Inc
11050 West Little York Rd Building C-1
Houston, TX 77041

Visit our website at

www.luceco.com