

APPROVALS:

TYPE:
NOTES:

JOB:

SHOPLIGHT - LSLA

PRODUCT SPECIFICATIONS

INPUT VOLTAGE:

- 120V

CONSTRUCTION:

- Hanging hardware included
- Instant light output
- 5ft cord
- Inline switch included

BODY FINISH: White

BEAM DISTRIBUTION: 240°

MOUNTING OPTIONS: Perfect for hanging, or flush mount installation

COLOR TEMPERATURE: 4000K as standard. Other color temps available; subject to minimum quantity.

CRI: Greater than 80

EFFICACY: Up to 100 Lm/W

IGNITION TIME: Less than 1sec.



FEATURES


- Reduced energy and maintenance costs
- High efficacy - increased lumen output
- Easy plug-in design
- Ideal for garages, utility rooms, and workshops

STANDARDS

RoHS	Complies with restriction of the use of certain hazardous substances
UL	Luminaires, light-emitting-diode
LM-79	IESNA method for the electrical and photometric measurements of LED light products
LM-80	IESNA method for measuring lumen maintenance of LED light sources
TM-21	IESNA method for projecting the lumen maintenance of LED light products



DIMENSIONS

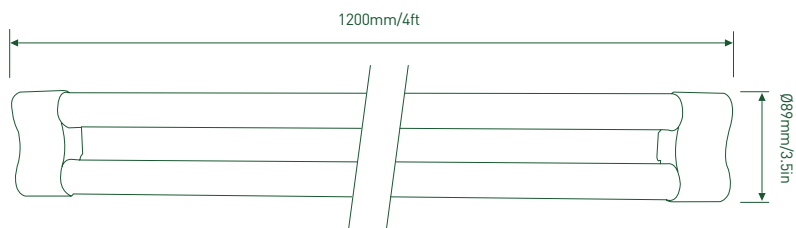

US Help line - **1 800 645-6460**
p - **281 978-2509**
e - **us_sales@luceco.com**

Luceco Inc
11050 West Little York Rd Building C-1
Houston, TX 77041

Visit our website at

www.luceco.com

CCT



4000K 'neutral white' color temperature as standard.

Other color temperatures available to order, subject to minimum requirement

3000K / 5000K / 5700K / 6500K

ORDERING

MODEL NUMBER	LUMENS	WATTAGE
L36SLAG1XBP40-US	3600	36W

US Help line - **1 800 645-6460**
p - **281 978-2509**
e - **us_sales@luceco.com**

Luceco Inc
11050 West Little York Rd Building C-1
Houston, TX 77041

Visit our website at

www.luceco.com