

APPROVALS:

TYPE:
NOTES:

JOB:

SLIMLINE TRIPOD WORKLIGHT - LSWT

PRODUCT SPECIFICATIONS

INPUT VOLTAGE:

- 120-277V

CONSTRUCTION:

- Sturdy steel stand, die-cast housing with tempered glass
- Lightweight frame
- Weatherproof power switch on each floodlight for independent switching
- Supplied with 15A 120V US plug
- 9' of SJTW cord provided
- Built-in cable storage
- Fixed output integrated driver

BODY FINISH: Yellow

BEAM DISTRIBUTION: 95°

COLOR TEMPERATURE: 5000K as standard. Other color temps available; subject to minimum quantity.

CRI: Greater than 80

EFFICACY: Up to 120 Lm/W

IGNITION TIME: Less than 1sec.



FEATURES


- 90% energy savings over halogen
- Low maintenance

STANDARDS

RoHS	Complies with restriction of the use of certain hazardous substances
UL	Luminaires, light-emitting-diode
LM-79	IESNA method for the electrical and photometric measurements of LED light products
LM-80	IESNA method for measuring lumen maintenance of LED light sources
TM-21	IESNA method for projecting the lumen maintenance of LED light products



DIMENSIONS

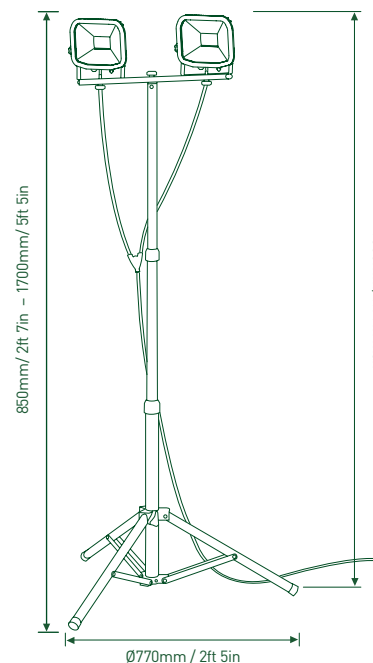

US Help line - **1 800 645-6460**
p - **281 978-2509**
e - **us_sales@luceco.com**

Luceco Inc
11050 West Little York Rd Building C-1
Houston, TX 77041

Visit our website at

www.luceco.com

CCT



5000K 'neutral white' color temperature as standard.

Other color temperatures available to order, subject to minimum requirement

3000K / 4000K / 5700K / 6500K

ORDERING

MODEL NUMBER	LUMENS	WATTAGE	EQUIVALENT WATTAGE
LSWT210BR4-US	2x 600	2x 10W	2x 100W
LSWT220BR4-US	2x 1200	2x 20W	2x 200W
LSWT230BR4-US	2x 1800	2x 30W	2x 300W