


## EMERGENCY REMOTE DOWNLIGHT WITH WIDE AREA DISTRIBUTION

- Materials: Makrolon® body and polycarbonate diffuser
- Ni-Cd batteries
- 24 hours initial battery charge

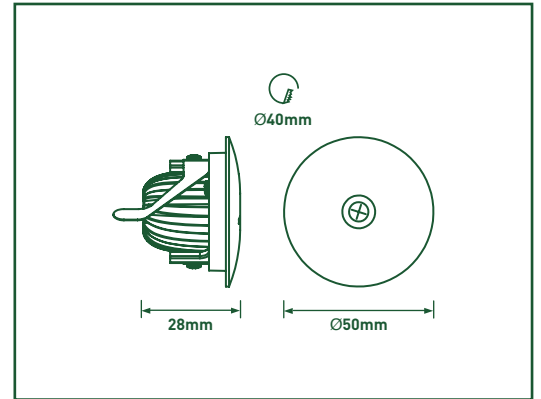

**3 year**  
Standard  
WARRANTY

**1 year**  
on site  
WARRANTY

3 years standard and 1 year onsite warranty available in the UK. Rest of the world may vary, please ask your local distributor for more information.

**500**  
mA

**3HR**  
EMERGENCY

BEAM  
ANGLE  
**110°**

**IP20**  
RATED

**230v**  
/50hz

CAT NO.	DESCRIPTION	LUMINAIRE LUMENS	WATTAGE
LEM6DLM3WA	3hr Maintained emergency	160	6W
LEM8DLM3WS	3hr Maintained self test emergency	160	8W
LEM6DLM3WD	3hr Maintained DALI emergency	160	6W
LEM2DLNM3WA	3hr Non-maintained emergency	160	2W

### SPACING TABLE

MOUNTING HEIGHT (MTRS)	TRANSVERSE				AXIAL			
	TO WALL (MTRS)		BETWEEN FITTINGS (MTRS)		TO WALL (MTRS)		BETWEEN FITTINGS (MTRS)	
	0.5 LX	1 LX	0.5 LX	1 LX	0.5 LX	1 LX	0.5 LX	1 LX
2.5	3.8	3.4	8.2	7.6	3.7	3.4	6.9	6.9
3	4.3	4	9.5	8.7	4.3	4	7.9	7.9
4	5.4	4.7	11.8	9.9	5.4	4.7	10.9	9.9
5	6.3	4.6	13.9	11.9	6.2	4.8	12.9	11.9
6	6.8	3	13.9	12.9	6.7	3	14.9	13
8	5.9	0	17.9	7.8	5.5	0	18.7	8.1

Tech Help Line  
UK - **03300 249 279**  
Non UK - **+44 (0)1952 238 100**

Supplied by Nexus Industries Ltd  
Nexus Distribution Centre, Stafford Park 1  
Telford, Shropshire, TF3 3BD

Visit our website at  
**www.luceco.uk**


## LEM6DLM3WA

### LUMINAIRE PERFORMANCE

Light Output Ratio: 100%  
 Luminaire Efficacy: 26.67 lm/W  
 Light Distribution: A50 ↓100.0% ↑0.0%  
 CIE Flux Codes: 52 95 99 100 100  
 UGR 4H 8H (20%, 50%, 70%) C0 / C90: 29.2 / 29.1

Quantity: 1  
 Designation: LED  
 Colour Temperature: 6000K  
 Luminous flux: 160 lm  
 CRI: 80

### LUMINOUS INTENSITY

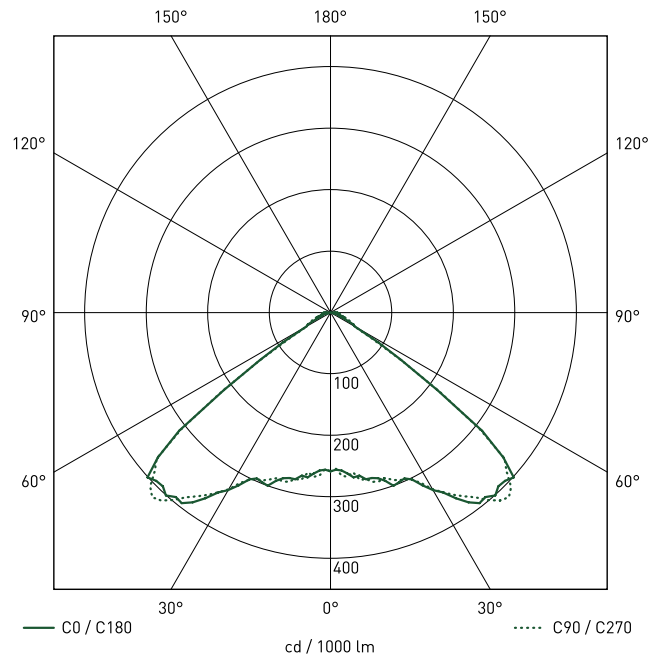


## LEM8DLM3WS

### LUMINAIRE PERFORMANCE

Light Output Ratio: 100%  
 Luminaire Efficacy: 20 lm/W  
 Light Distribution: A50 ↓100.0% ↑0.0%  
 CIE Flux Codes: 52 95 99 100 100  
 UGR 4H 8H (20%, 50%, 70%) C0 / C90: 29.2 / 29.1

Quantity: 1  
 Designation: LED  
 Colour Temperature: 6000K  
 Luminous flux: 160 lm  
 CRI: 80

### LUMINOUS INTENSITY

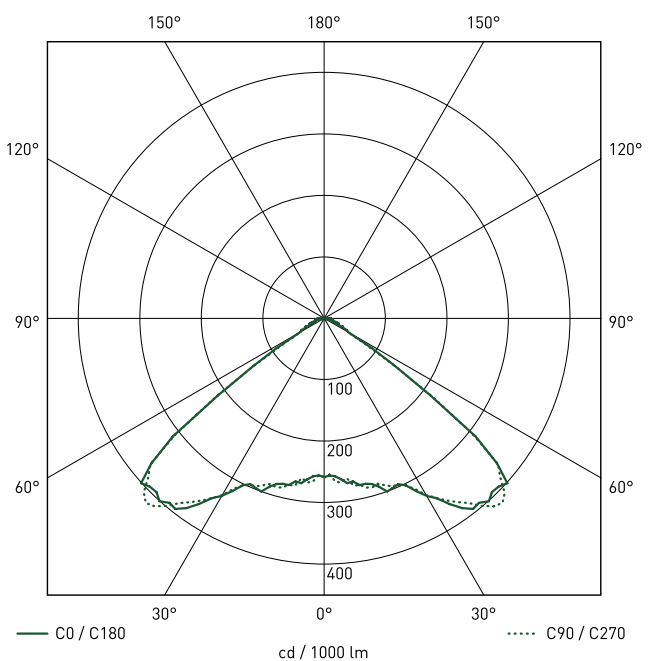


# LUCECO PHOTOMETRIC DATA

## LEM6DLM3WD LUMINAIRE PERFORMANCE

Light Output Ratio:	100%	Quantity:	1
Luminaire Efficacy:	26.67 lm/W	Designation:	LED
Light Distribution:	A50 ↓100.0% ↑0.0%	Colour Temperature:	6000K
CIE Flux Codes:	52 95 99 100 100	Luminous flux:	160 lm
UGR 4H 8H (20%, 50%, 70%) C0 / C90:	29.2 / 29.1	CRI:	80

### LUMINOUS INTENSITY

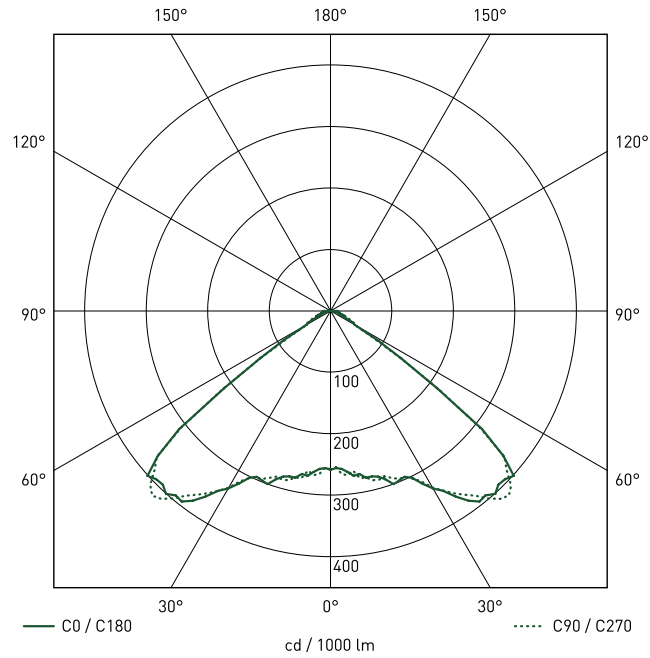

## LEM2DLNM3WA LUMINAIRE PERFORMANCE

Light Output Ratio:	100%	Quantity:	1
Luminaire Efficacy:	80 lm/W	Designation:	LED
Light Distribution:	A50 ↓100.0% ↑0.0%	Colour Temperature:	6000K
CIE Flux Codes:	52 95 99 100 100	Luminous flux:	160 lm
UGR 4H 8H (20%, 50%, 70%) C0 / C90:	29.2 / 29.1	CRI:	80

### LUMINOUS INTENSITY

